


SKY-TESL-H100-80P

SKY-TESL-H800-80P

NVIDIA® Tesla® H100

NVIDIA® Tesla® H800

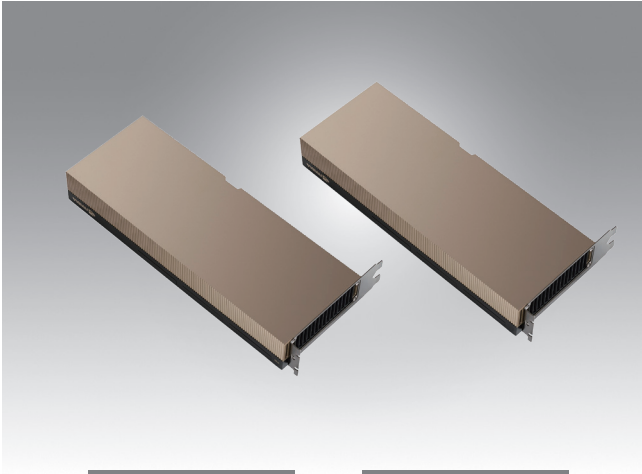

SKY-TESL-H100-80P

SKY-TESL-H800-80P

Features

- NVIDIA Hopper GPU architecture
- Compute-optimized GPU
- 14592 NVIDIA® CUDA® Cores
- 456 NVIDIA® Tensor Cores
- 80GB HBM2e memory with ECC
- Up to 2TB/s memory bandwidth
- Max. power consumption: 350W
- Graphics bus: PCI-E 5.0 x16
- Thermal solution: Passive

Introduction

NVIDIA® Tesla® H100 (SKY-TESL-H100-80P) and Tesla® H800 (SKY-TESL-H800-80P) PCIe cards are compute-optimized GPUs built on the NVIDIA Hopper architecture with dual-slot 10.5-inch PCI Express Gen5 interface in a passive heatsink cooling design suitable for data centers. Combining NVIDIA Gen4 tensor cores and HBM2e memory, they provide a high-performance computing solution. Supporting a Gen2 multi-instance GPU (MIG) feature, which guarantees quality of service (QoS) with secure, partitioned hardware, they allow maximum utilization of GPU resources. The NVIDIA NGC™ catalog provides software, libraries, and optimized AI models and applications to complete data center solutions. With cutting-edge features and technologies, NVIDIA Tesla H100 and H800 are perfect for AI deep learning training and inference, data analytics, and high-performance computing (HPC) applications. NVIDIA Tesla is the first choice for high-standard computing solutions in enterprise and science deployments.

Specifications

Product Name	Tesla H100	Tesla H800
Part Number	SKY-TESL-H100-80P	SKY-TESL-H800-80P
GPU Architecture	Hopper	Hopper
GPU Memory	80GB HBM2e	80GB HBM2e
Memory Bandwidth	2TB/s	2TB/s
NVIDIA CUDA Cores	14592	14592
Tensor Cores	456	456
Single-Precision Performance	48 TFLOPS	48 TFLOPS
Double-Precision Performance	24 TFLOPS	0.8 TFLOPS
FP64 Tensor Core Performance	51 TFLOPS	0.8 TFLOPS
Fast FP64	Yes	No
System Interface	PCI Express 5.0 x16	PCI Express 5.0 x16
Max Power Consumption	350W	350W
Power Connector	16-Pin PCIe	16-Pin PCIe
Thermal Solution	Passive	Passive
Multi-Instance GPU	Up to 7	Up to 7
Form Factor	4.4 inches H x 10.5 inches L dual slot, full height	4.4 inches H x 10.5 inches L dual slot, full height
NVLink Support	3 NVLINK Bridges for 2 GPUs, 600GB/s	3 NVLINK Bridges for 2 GPUs, 400GB/s
Media Acceleration	7 JPEG Decoder, 7 Video Decoder	7 JPEG Decoder, 7 Video Decoder
Display Connectors	Headless Design	Headless Design