

HPC-6120 ASMB-610

1U 18" short-depth Edge Accelerator Server with Intel® Xeon® W & 10th Gen. Core™ processors, supporting 4 expansion slots



Features

- Processor: Single Intel® Xeon® W & 10th Gen. Core™ processors
- Memory: DDR4 2933/2666/2400 MHz ECC/Non-ECC UDIMM up to 128 GB
- One PCIe x16 slot or two PCIe x8 slots support FH/10.5" Length Cards*
- Two PCIeX4 slots support one external and one internal Low Profile Cards
- Two hot-swappable 2.5" drive bay support SASII/SATAIII drives
- One onboard M.2 2280 B+M key
- 4 x GbE, 2 x USB3.2, 1 x Serial Port, 1x VGA, 1 x IPMI
- 650W 1+0 Platinum non-redundancy Power supply

* Support double-deck GPU Card with active fan




Specifications

Processor System	Socket	Intel LGA 1200	
	CPU Type	Intel® Xeon® W and 10th Generation Core™ i3/i5/i7/i9 series (TDP up to 95W)	
	Chipset	Intel W480E Chipset	
Memory	Total slots	4 (2 DIMM per channel)	
	Capacity	128GB	
	Memory type	DDR4 ECC/Non-ECC 2933/2666/2400 MHz UDIMM (288-pin)*	
Graphics	Controller	Aspeed AST2600	
	VRAM	DDR4 4Gb	
Expansion Slot	LR Riser	One PCIe X16 slot (Gen3 X16 link) or two PCIe X8 slot (Gen3 X8 link) for FH/10.5" expansion card	
	MR Riser	One PCIe X4 slot (Gen3 X4 link) for External Low Profile card	
	IR Riser	One PCIe X4 slot (Gen3 X4 link) for Internal Low Profile card	
Storage	2.5" (Hot-swap)	2	
	M.2 (2280)	1 (SATA/PCIe Gen3 X4 link)	
Ethernet	Interface	4 x 10/100/1000 Mbps Gigabit Ethernet	
	Controller	1 x Intel I350	
Front I/O Interface	USB	2 x USB3.2	
	Serial port	1	
Rear I/O Interface	USB	2 x USB3.2	
	Display	1 x VGA	
	RJ-45	5 (4 x GbE + 1 dedicated NIC for IPMI)	
Internal connector	Type-A USB	1	
	Serial port header	1	
	PS/2 Keyboard/Mouse header	1	
	LPC	1	
Watchdog Timer	Output	System reset	
	Interval	Programmable, 1~255 sec/min	
Power Supply	Output Range	650W Platinum 1+0 non-redundancy Power Supply	
	Input Range	AC 100 ~ 240 V	
Cooling	System Fan	Three 40x56 high speed fan for CPU Two 40x28 high speed fan for Cards	
	Air Filter	-	
Miscellaneous	LED Indicators	Power Status, LAN1-LAN4 Status, System information LED	
	Remote Management	Advantech Remote Monitoring Utility	
Environment	Temperature	Operating 0 ~ 40 °C (32 ~ 104 °F)	Non-Operating -40 ~ 70 °C (-40 ~ 156 °F)
	Humidity	10 ~ 85% @ 40 °C 10 ~ 95% @ 40 °C	
	Vibration (5 ~ 500 Hz)	0.3 Grms 2 G	
	Shock	10G (with 11ms duration, half sine wave)	
Physical Characteristics	Dimension (W x H x D)	438 mm x 44 mm x 480 mm (17.24" x 1.73" x 18.9")	
	Weight (N.W. / G.W.)	8.5kg/10.5kg	

* ECC support please reference to CPU specification

* Some Xeon processors have no graphic support. Please check Intel specification for processor graphics availability

Dimensions

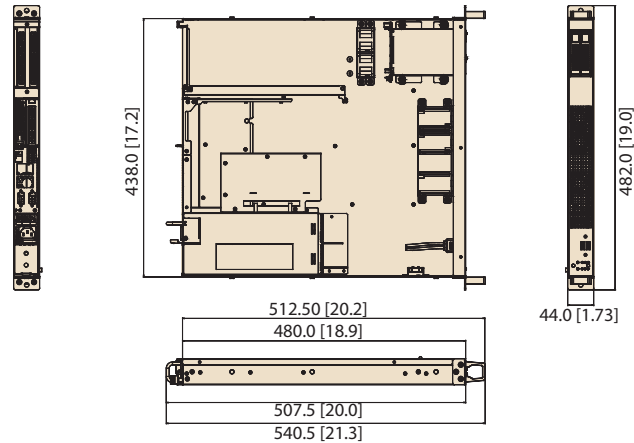

Unit: mm [inch]

Ordering Information

Part Number	Compatible Chassis	Memory	Chipset	GbE/ IPMI	Graphic
ASMB-610-00A1	HPC-6120	4 x DDR4 Non-ECC/ECC UDIMM	W480E	4/ 1(dedicated NIC)	AST 2600
Part Number	Compatible MB	CPU	CPU Cooler	GPU	Build-in PSU
HPC-6120-50ZX	ASMB-61 series	Single P, up to 95W	1U Heatsink	150W with active FAN	500W, Single Flex ATX PSU
HPC-6120-65ZX	ASMB-61 series	Single P, up to 95W	1U Heatsink	300W with active FAN	650W, 1+0 Single (non-redundancy) PSU

System Contents

Items	Advantech P/N	Quantity
Startup manual	2042061000	1
Rackmount Kit (handle and Ear set)	N/A	2

Optional Accessories


Items	Advantech P/N	Quantity
20" ~ 22" Slide Rail kit	968DE00012	1
TPM 2.0 module	PCA-TPM-00B1E	1
LGA 1200 CPU heatsink for 1U chassis	1960049408N001	1
GPU power cable for GPU card with PCIe 8P+8P power connector	1700030122-01	1
GPU power cable for GPU card with CPU 8P power connector	1700033606-01	1
650W Power MODULE	XSUN-TG15-0650-01	1
1U Front Bezel	98R1610020E	1

Front View



Buttons: Power/Reset
LED indicators: Power/ system information/ LAN1-LAN4

Front View

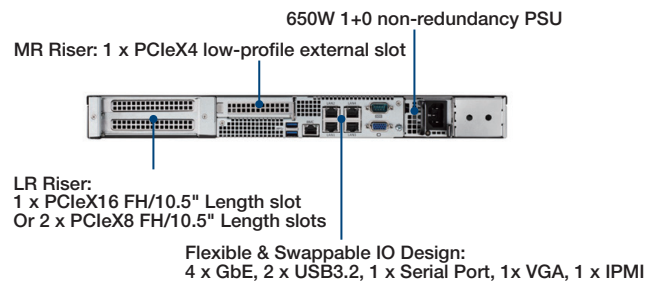

Inner View

